



Think Global Think Grepl

repl


i n t e r n a t i o n a l

DISCOVER
THE **VIGOUR** AND
GRACE IN YOUR
SPACE



GREEN X STONE

40C^x
400MM

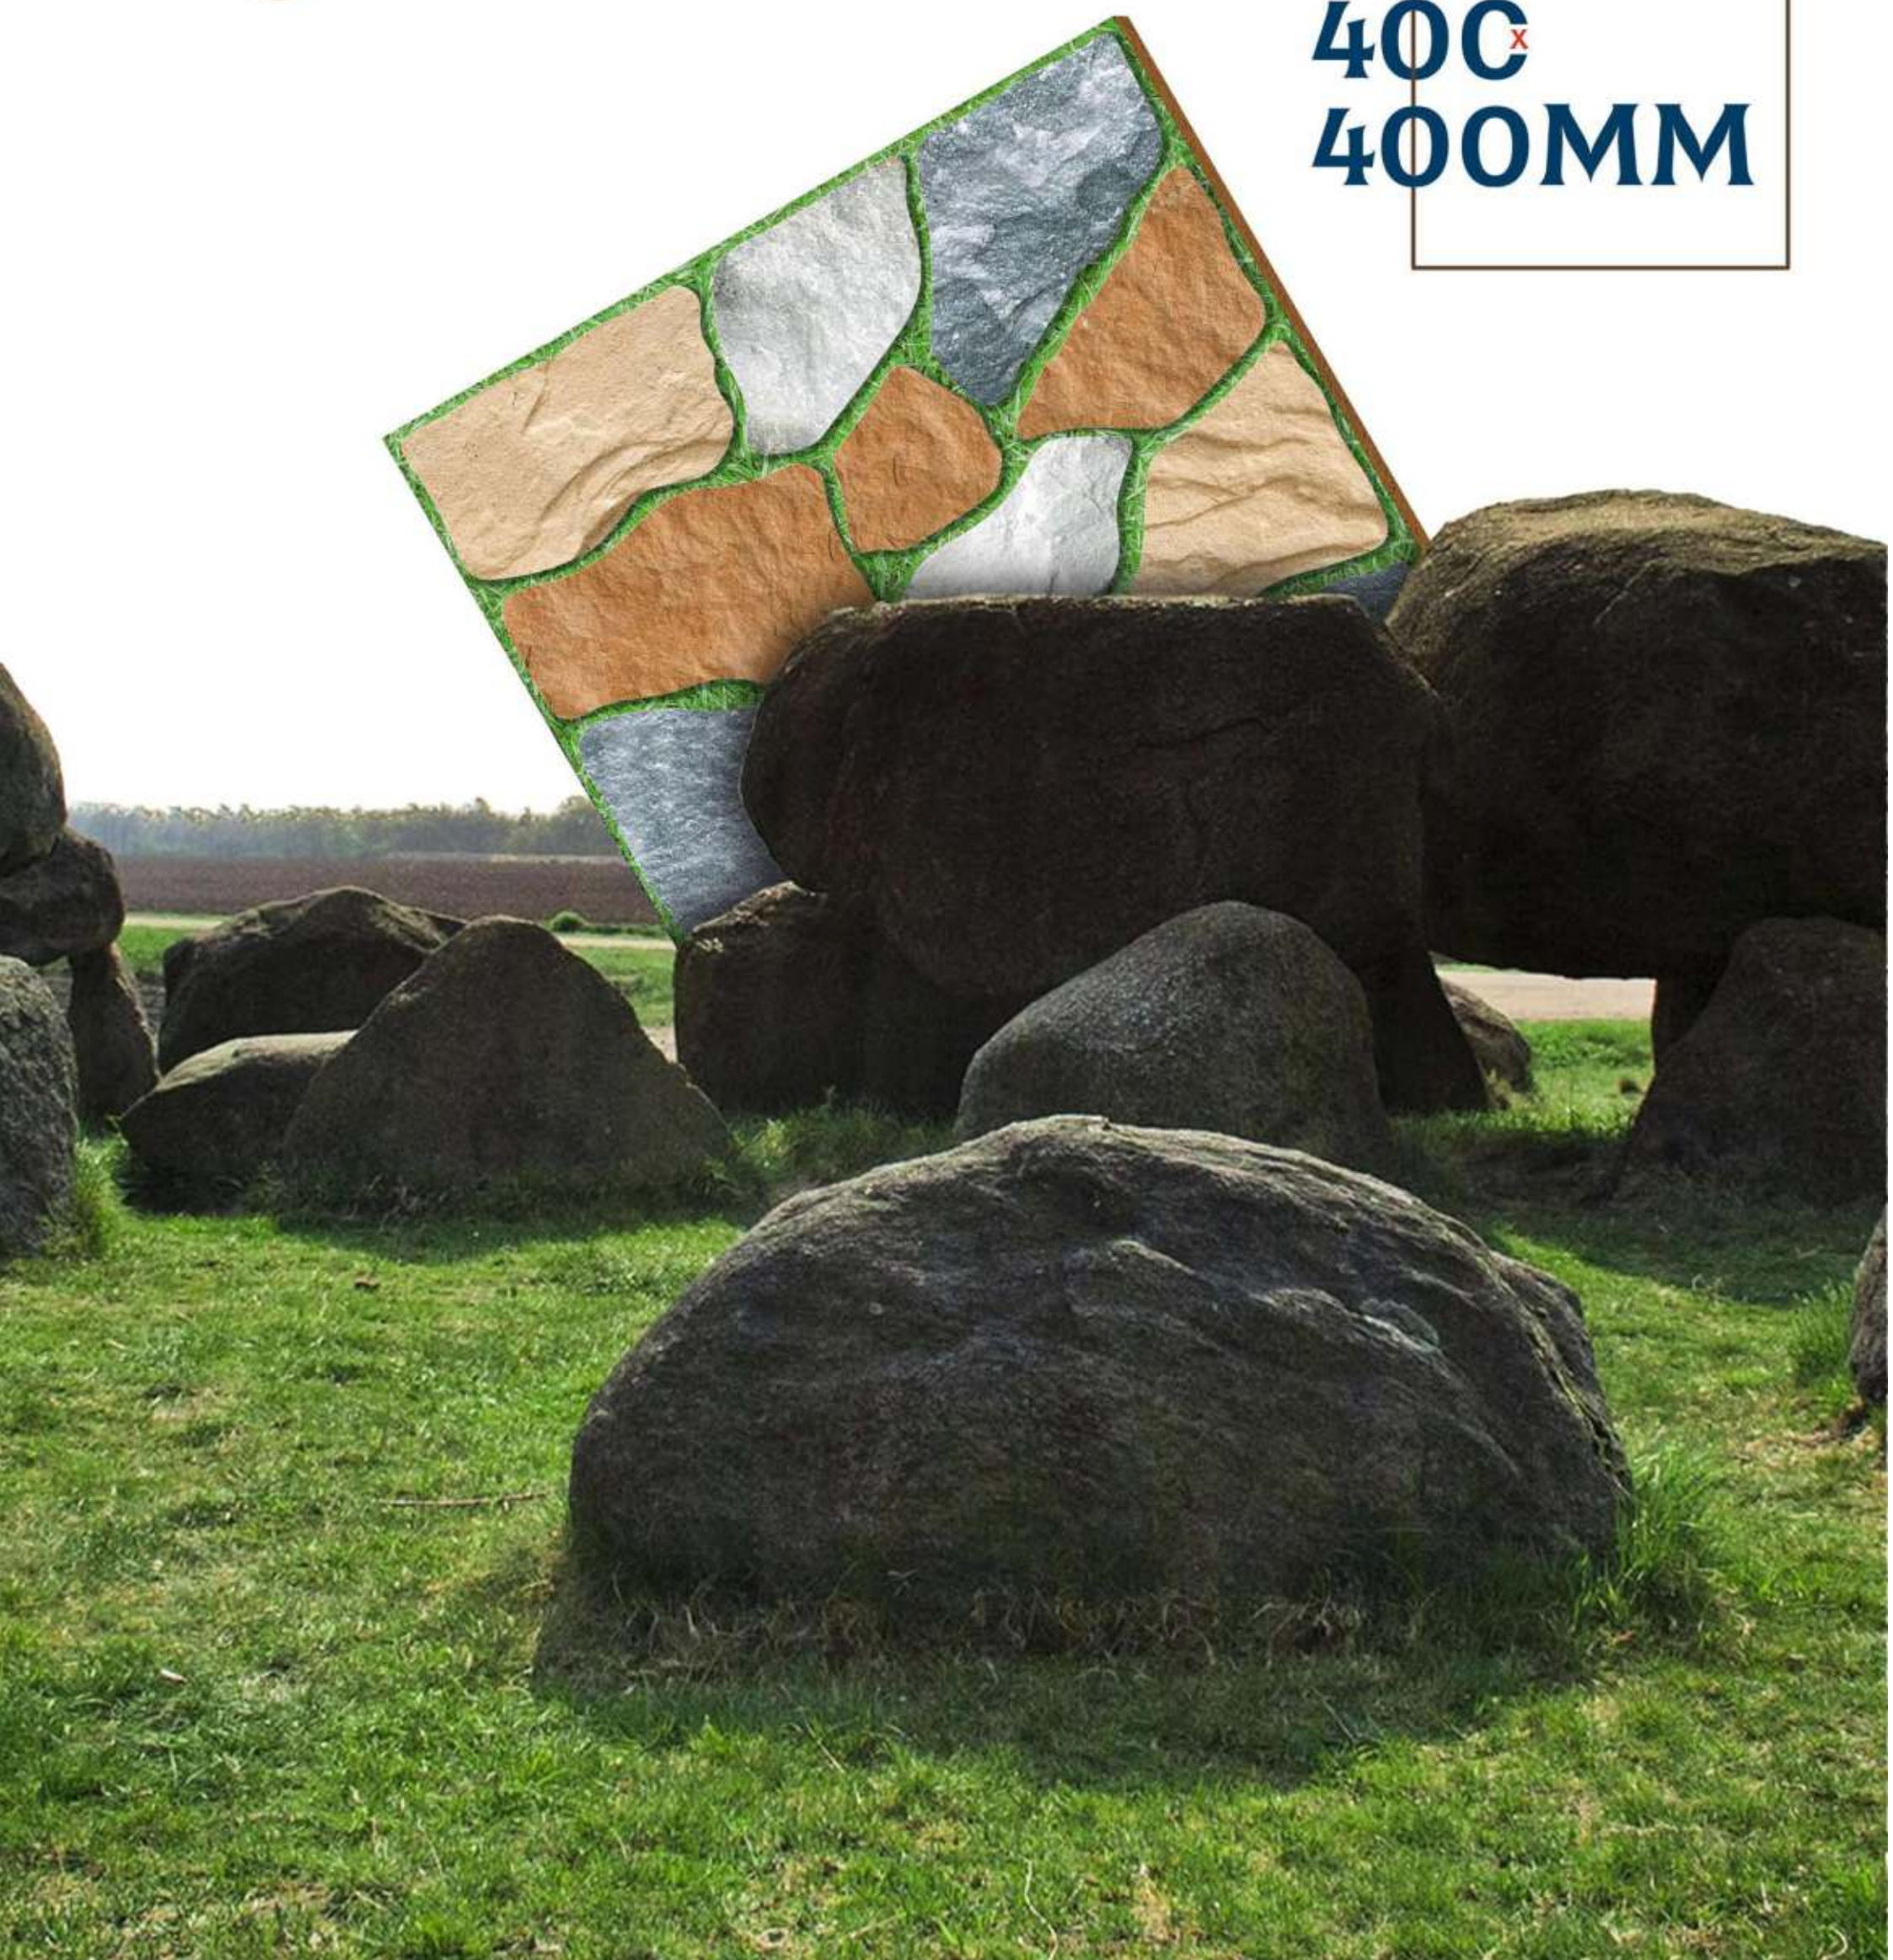




MARBLE SERIES



MATT
400x400mm

MA_3001

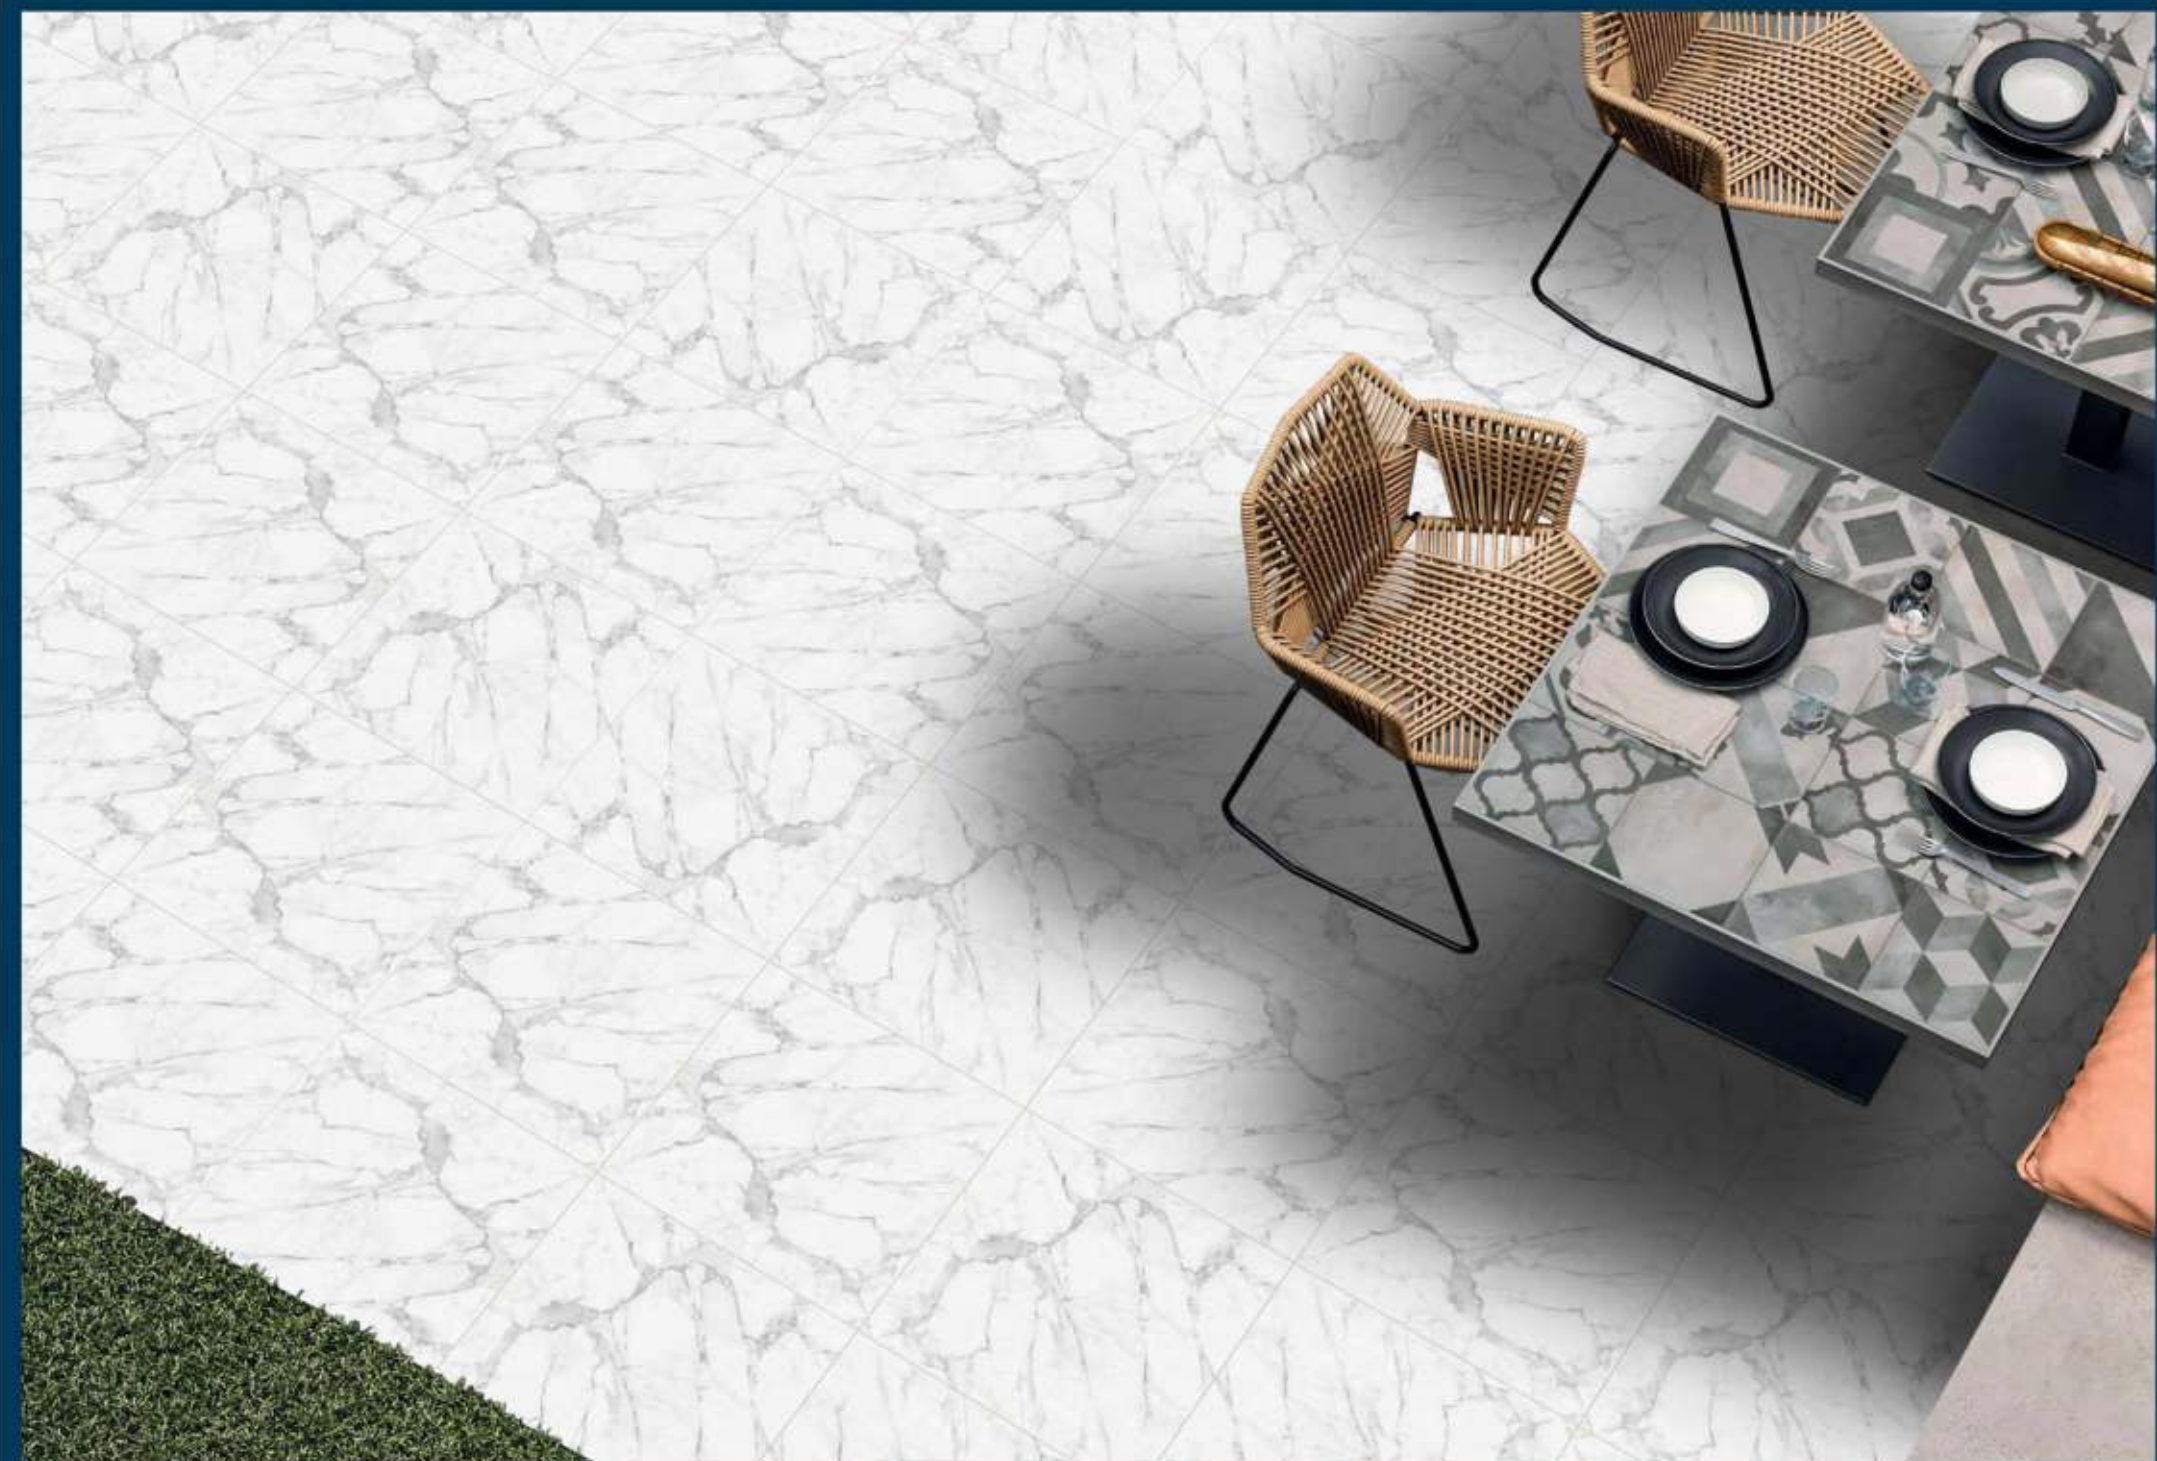

MARBLE SERIES




MATT
400x400mm

MA_3002



MARBLE SERIES

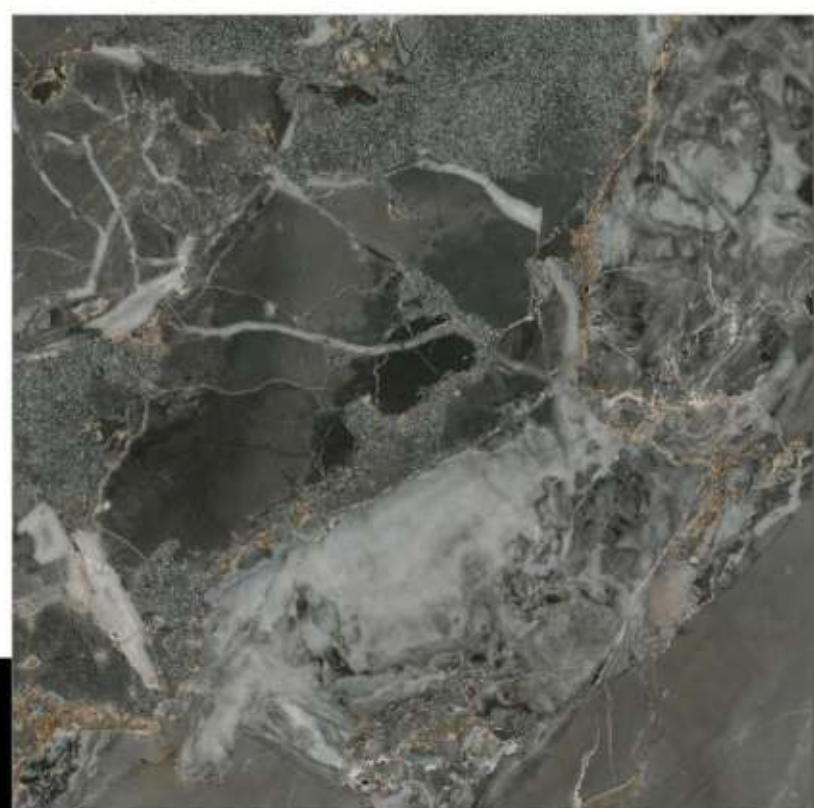

MATT
400x400mm

MA_3003



MARBLE SERIES



MATT
400x400mm

MA_3004




MARBLE SERIES



MATT
400x400mm

MA_3005

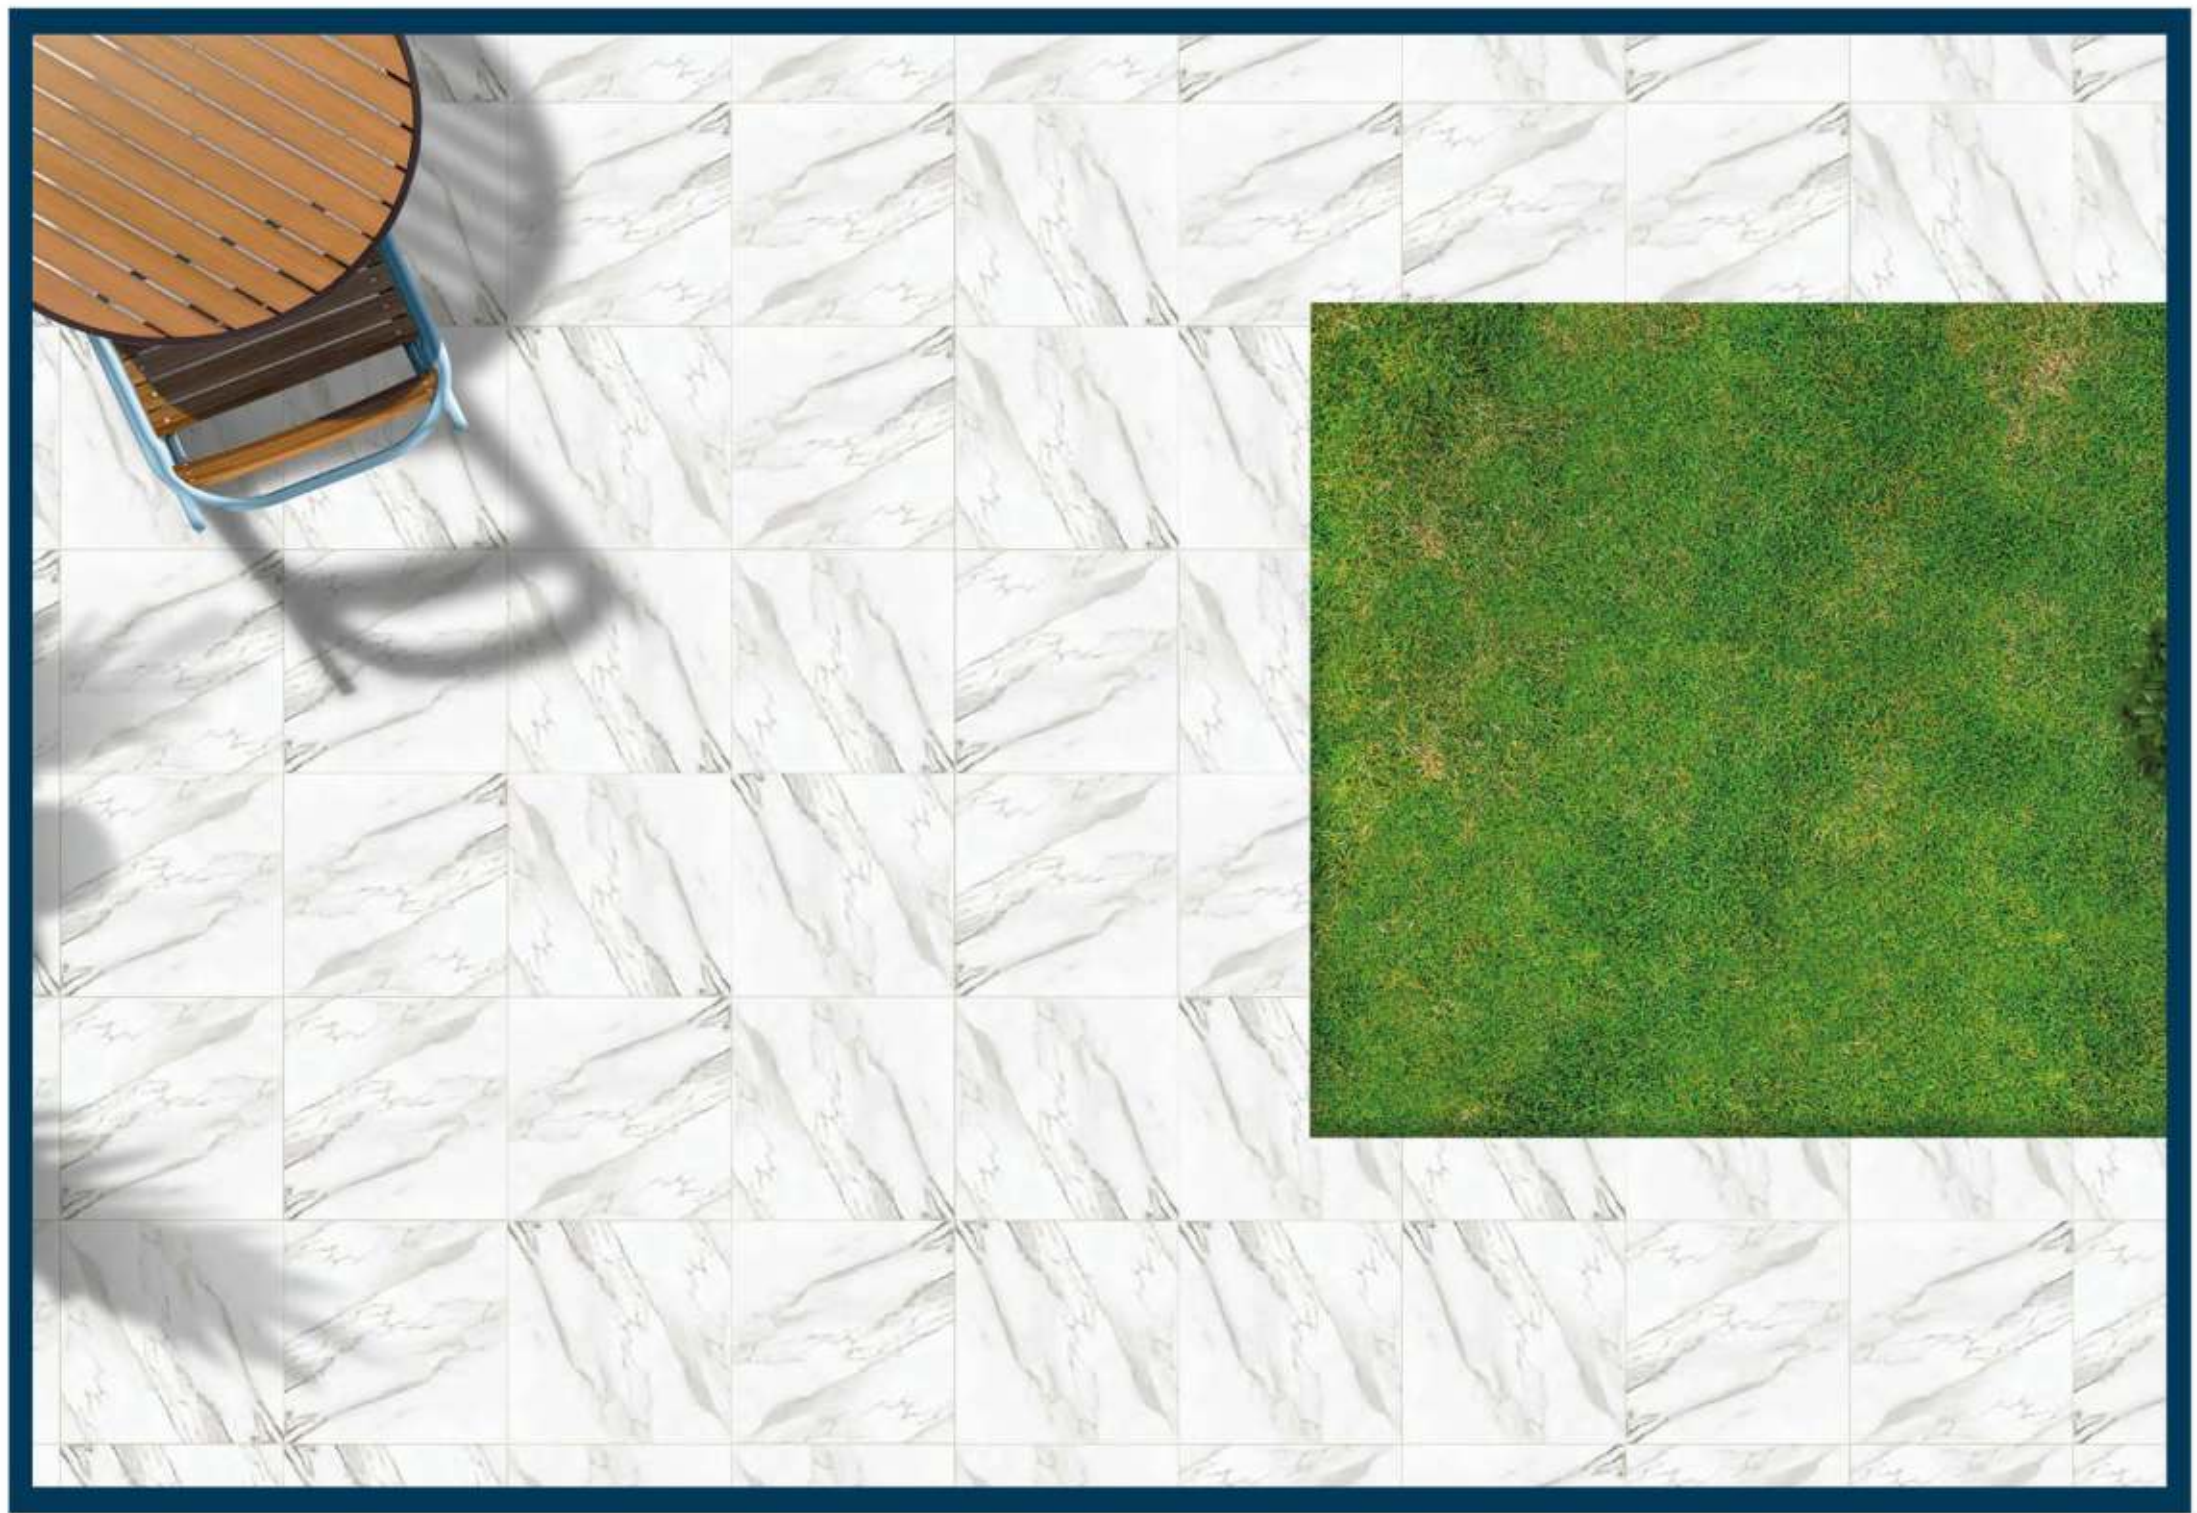

MARBLE SERIES



MATT
400x400mm

MA_3006




MARBLE SERIES



MATT
400x400mm

MA_3007

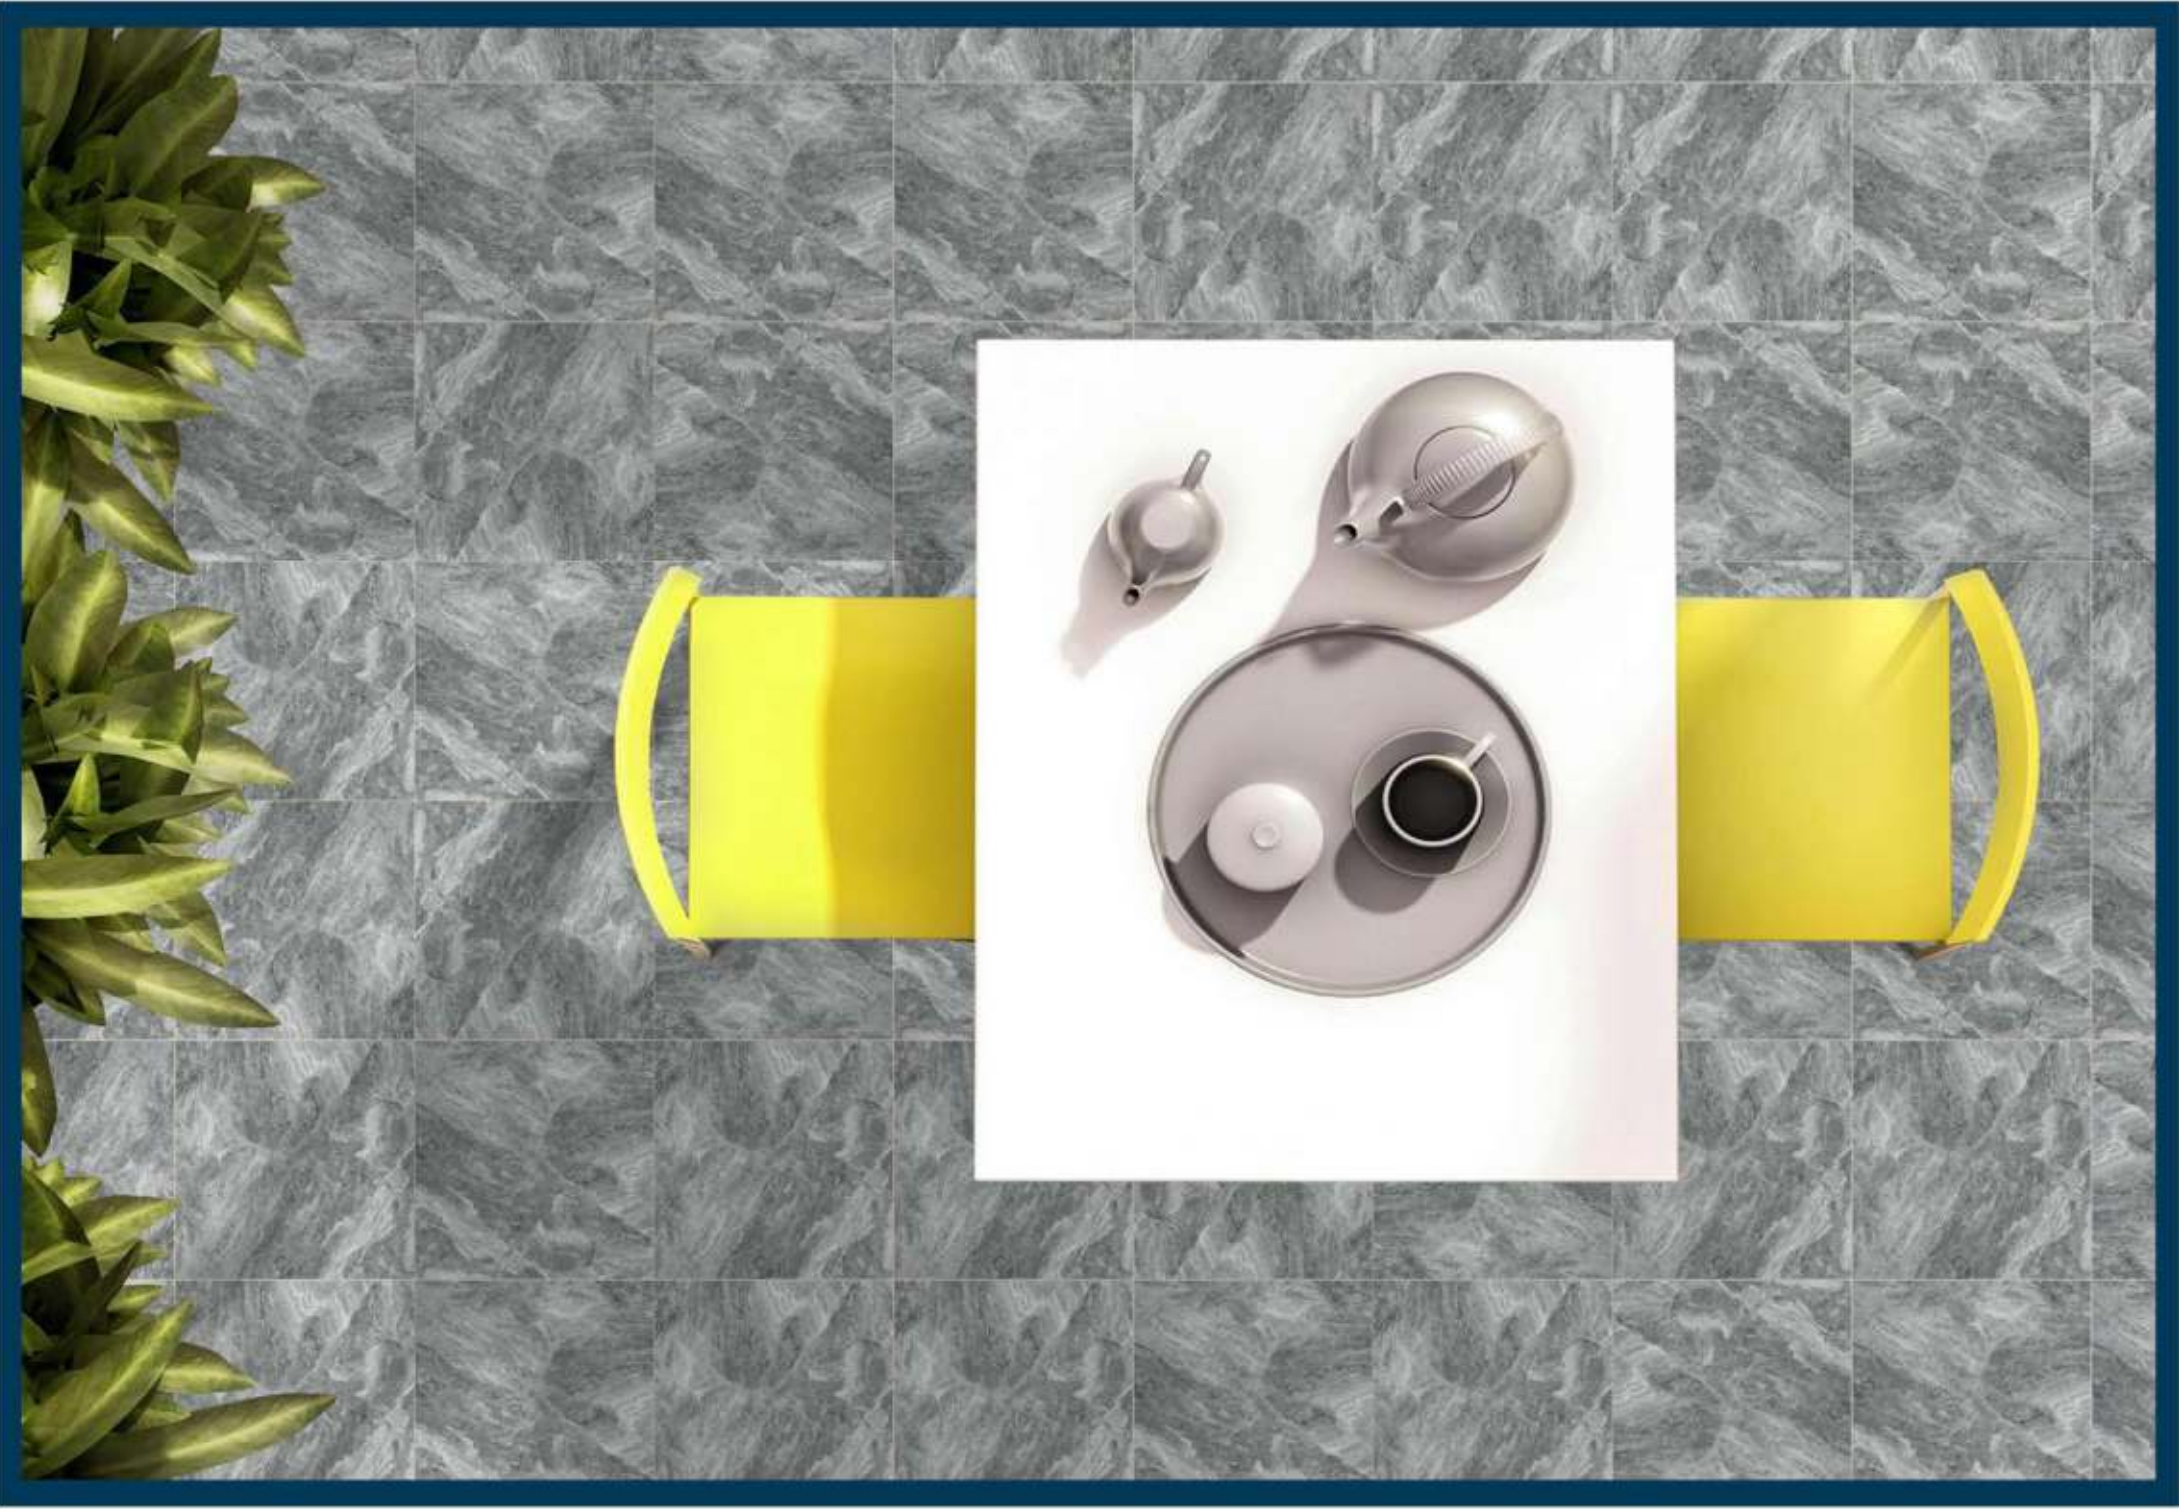

MARBLE SERIES



MATT
400x400mm

MA_3008



MARBLE SERIES




MATT
400x400mm

MA_3009



MARBLE SERIES

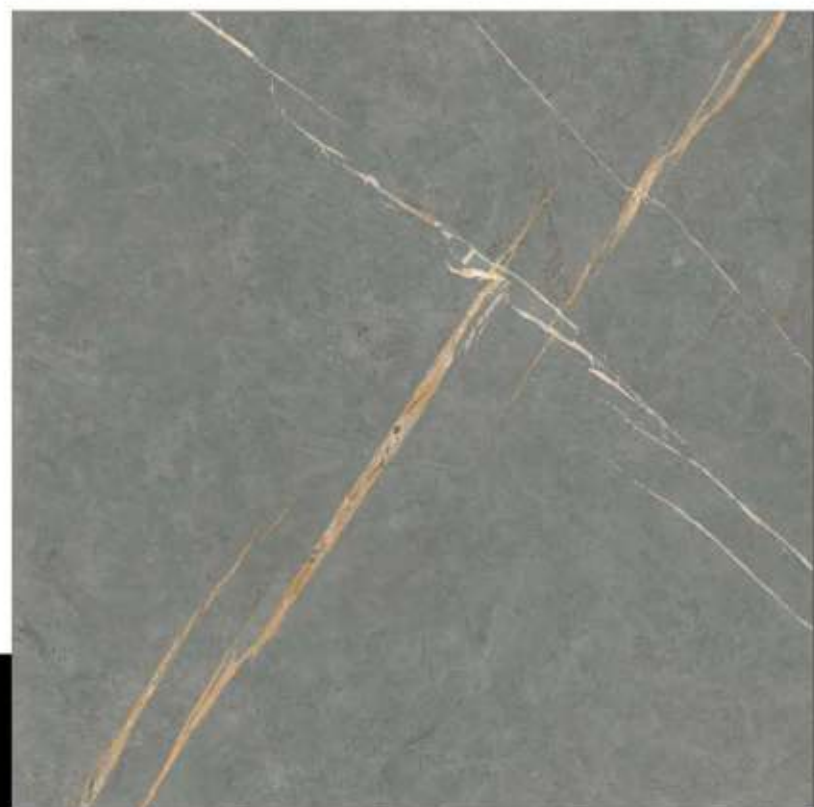

MATT
400x400mm

MA_3010



MARBLE SERIES



MATT
400x400mm

MA_3011



MARBLE SERIES



MATT
400x400mm

MA_3012




MARBLE SERIES



MATT
400x400mm

MA_3013

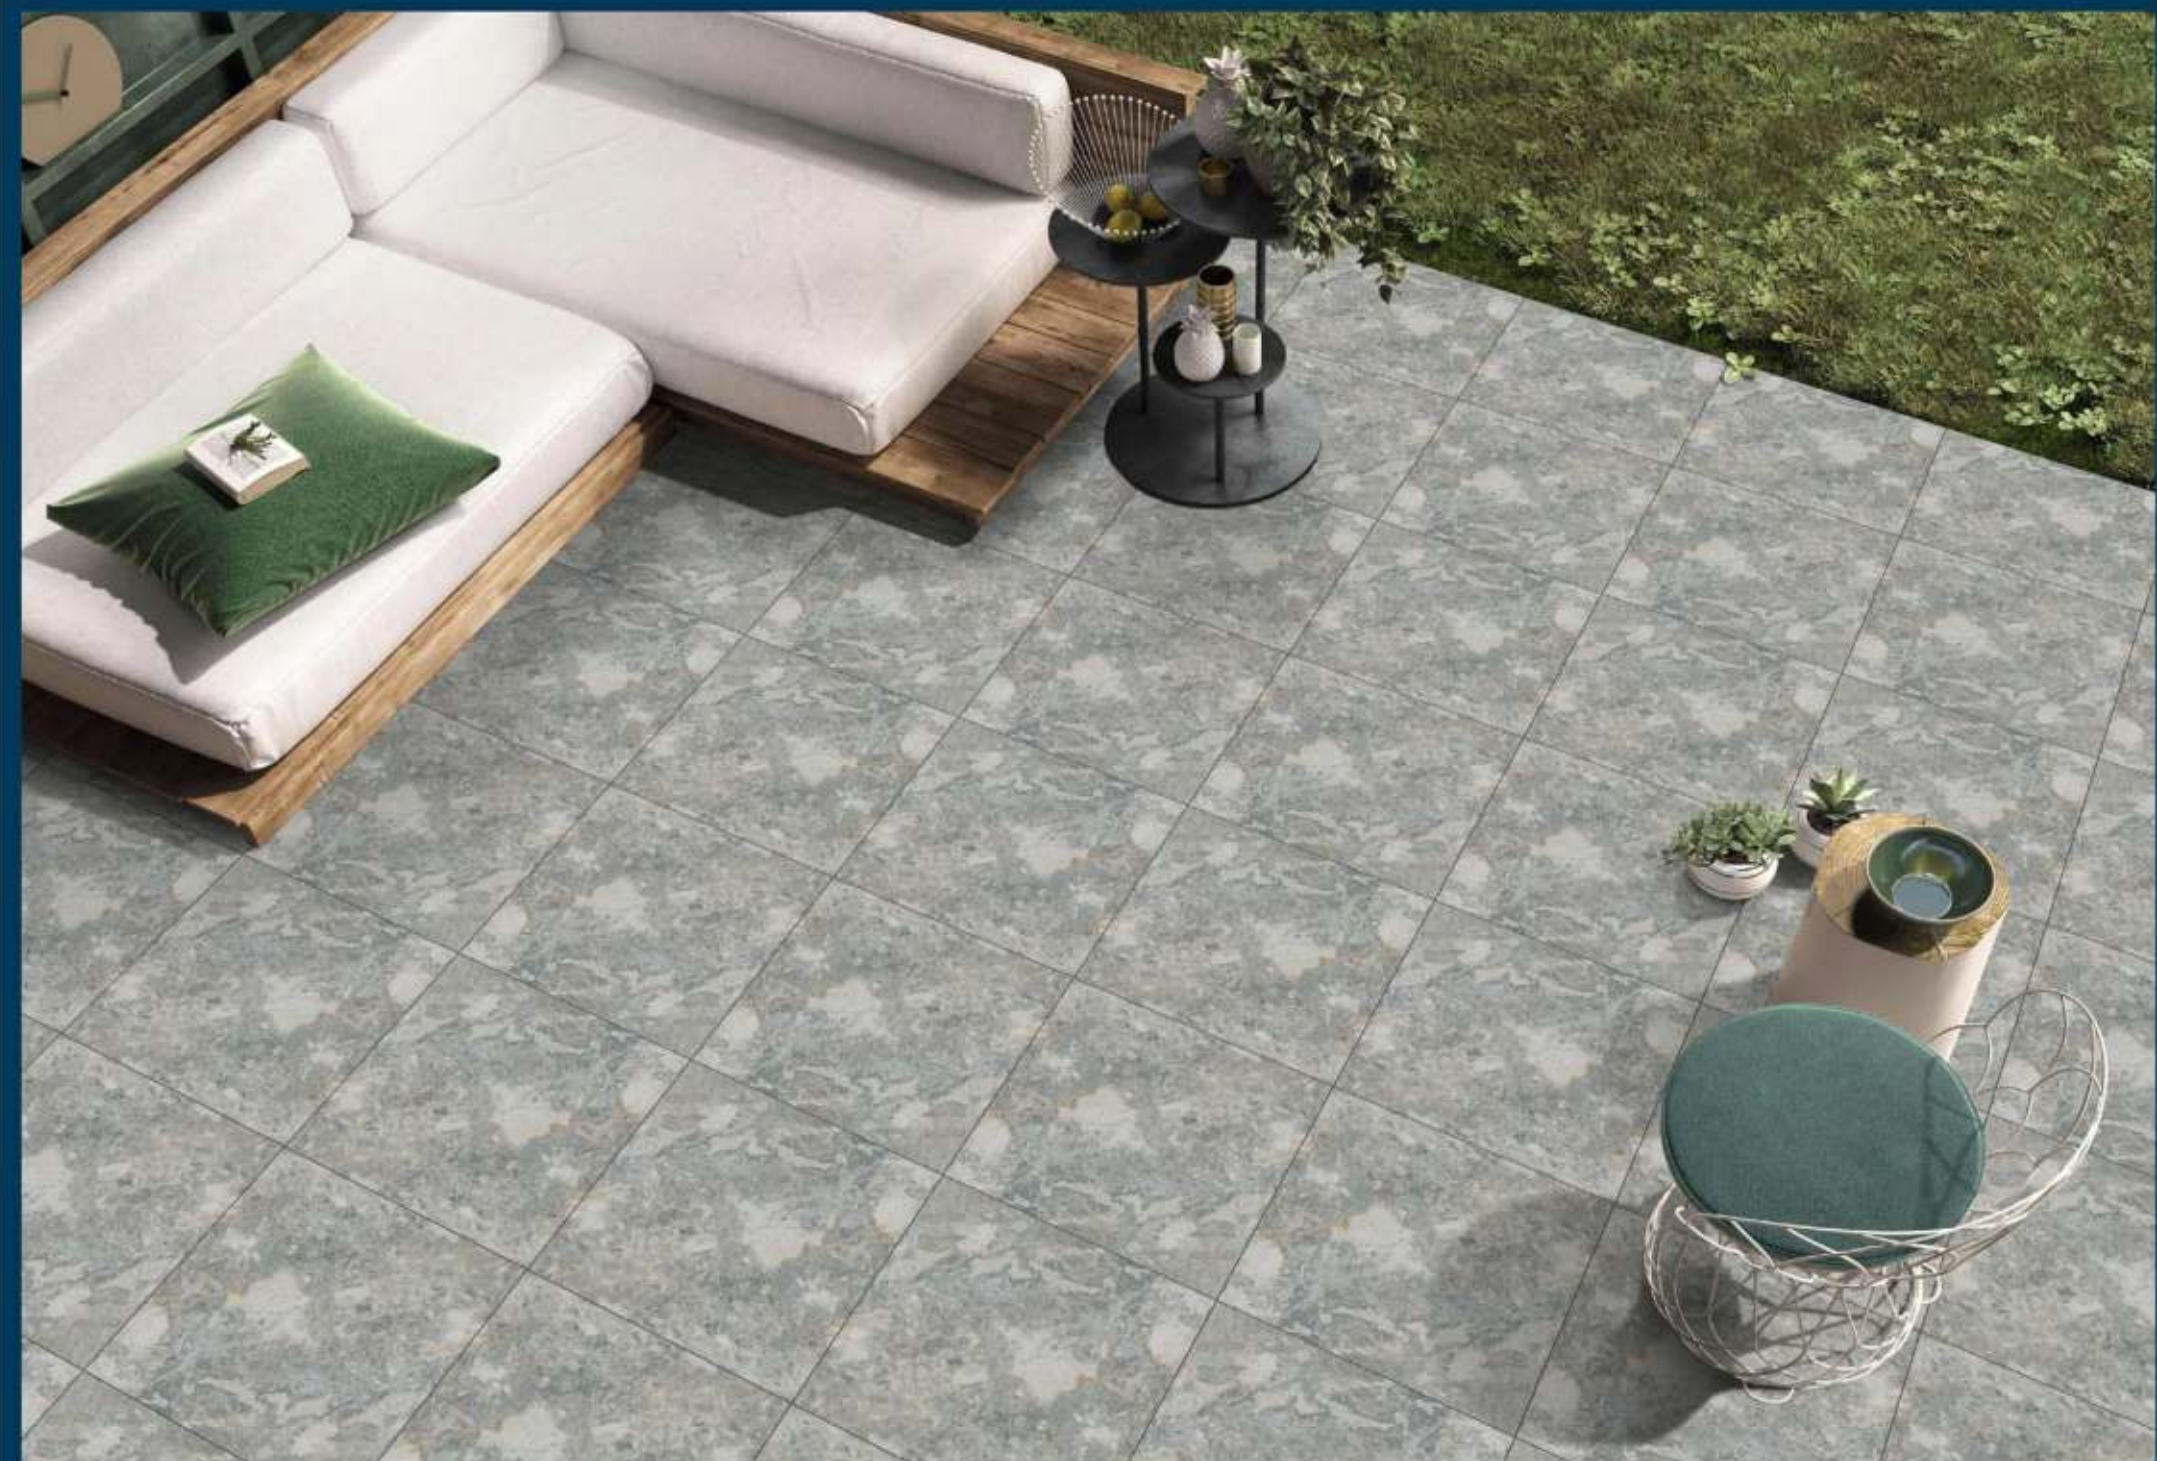

MARBLE SERIES



MATT
400x400mm

MA_3014



MARBLE SERIES



MATT
400x400mm

MA_3015

Technical Specification

Sr. No.	Characteristics	EN:177B-II AIS:13755	SILVENTA VALUE
1	Deviation in Length	± 2.5%	± 0.1%
2	Deviation in Thickness	± 2.5%	± 1.0%
3	Wedging	± 1.0%	± 0.2%
4	Surface Flatness	± 1.5%	± 0.2%
5	Water Absorption	< 1.0%	< 0.5%
6	Mohs Hardness		8
7	Flexural Strength	> 20 N/mm ²	> 45 N/mm ²
8	Abrasion Resistance	< 204 mm ² (EN 176)	< 144 mm ²
9	Thermal Expansion	9x10.6 (EN 176)	6x10.6
10	Thermal Shock Resistance	No Damage	No Damage
11	Resistance to acid (Wt. Loss)	< 1.5%	< 0.4%
12	Skid Resistance (Friction coefficient)	> 0.4 (EN 176)	> 0.6
13	Breaking Strength	± 2.5%	400 Kg/cm ²
14	Stain Resistance	Resistant (EN 176)	Resitant
15	Moisture Expansion	Nil (EN 176)	Nil

Note : 1. Our conformity to the above standards is applicable only for premium quality.




Packing Detail

Sr. No.	Size	Thickness (mm) _(Approx)	Pieces Per Box	Area/Box Sq. ft.	Area/Box Sq. mt.	Wt./Box Kgs. _(Approx)
1	400mm x 400mm (16"x16")	12.00	5	8.60	0.80	19
1	400mm x 400mm (DG)	12.00	5	8.60	0.80	19

Note :

1. Certain amount of size and shade variation is inherent in all ceramic products.
2. Our conformity to the above First is applicable only for Quality.
3. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company dose not accept responsibility once the tiles are laid.

Features :

								
Suitable For Floor	Frost Resistance	Anti Slip	Break Resistance	Easy To Install	Chemical Resistance	Resistance To Abrasion	Maintenance Free	Eco Friendly



THANK YOU...